




CD045Q- Series



- Size : $\varnothing 45\text{mm}$
- Housing / Impeller : Aluminum / Aluminum
- Motor : DC Brushless 3-Phase Motor
- Operating Temperature : $0^{\circ}\text{C} \sim +45^{\circ}\text{C}$
- Insulation : Class A

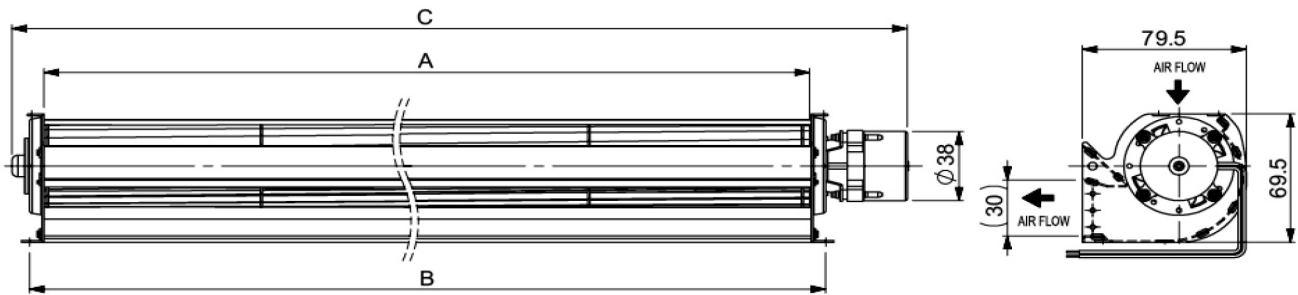

Model Number	Size (mm)			Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (mmH2O)	Noise (dB(A))	Weight (g)
	A	B	C								
CD04518V24B3HWQ	180	194	243	24	0.23	5.52	2000	67	4.1	46	450
CD04524V24B3HWQ	240	254	303	24	0.24	5.76	1800	81	3.7	45	530
CD04530V24B3HWQ	300	314	363	24	0.27	6.48	1700	95	3.6	44	610
CD04536V24B3HWQ	360	374	423	24	0.29	6.96	1600	113	3.1	43	690
CD04542V24B3HWQ	420	434	483	24	0.30	7.20	1500	127	2.6	42	770

